




# Doorcloser

## Information

You have just acquired a high quality AXA product. The instructions below must be followed closely in order to effectively install and operate this product.

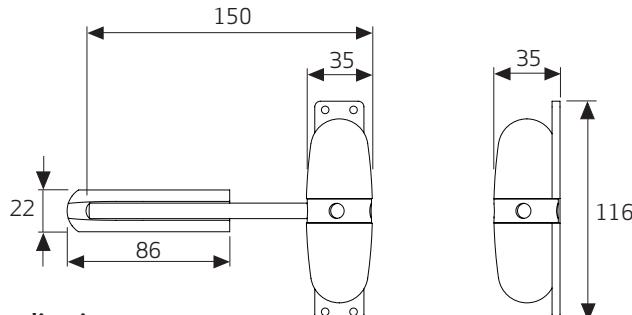


### Application

For flush (blunt) interior doors (hinge side)

### Installation tools (recommended)


Tape measure, (battery) drill, screwdriver, drill Ø 2 and 2,5 mm, bradawl/pencil.

**Mounting position**  
left or right

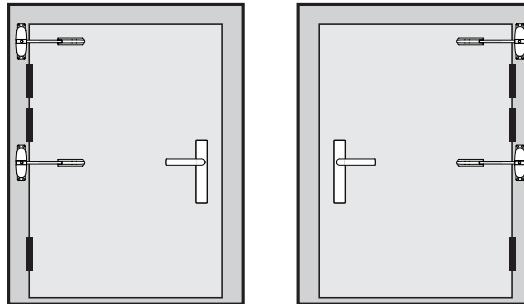

### Package contents


1. (1x) Door closer
2. (1x) Catcher
3. (1x) Pressure bar
4. (1x) Tensioning aid
5. (4x) Screws 3,5 x 25 mm
5. (2x) Screws 3,0 x 20 mm



## Installation manual

- 1 Place the door closer (1) on the hinge side of the frame and mark the screw holes with a pencil or awl (figure A). Pre-drill the holes (Ø 2.5 mm) and screw the door closer in place.

**⚠ The arrow on the door closer must point in the direction of the door.**

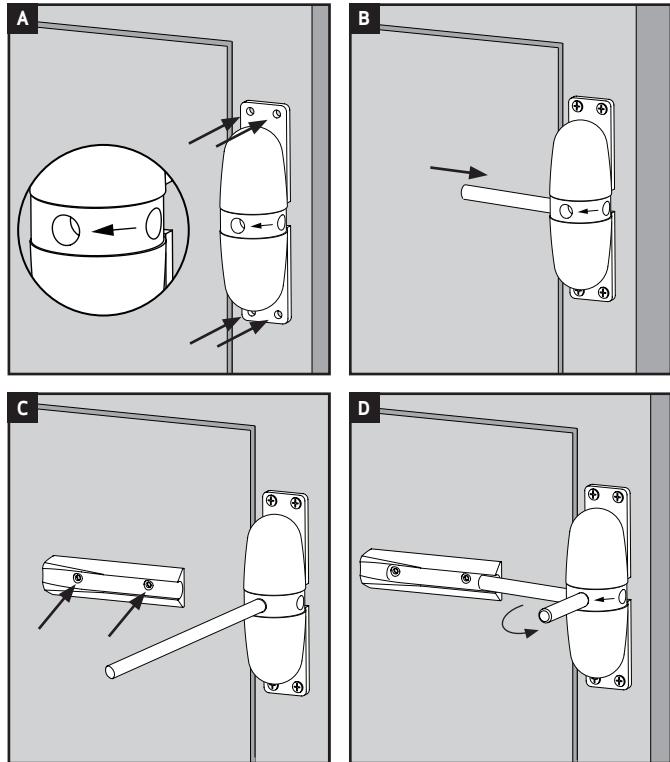

- 2 Screw the pressure rod (3) into the door closer. Use the mounting hole closest to the door (figure B).
- 3 Place the catch (2) behind the pressure bar on the closed door. Ensure that the catcher protrudes almost entirely behind the pressure bar (maximum 1 cm overlap). Mark the screw holes with a pencil or awl (figure C). Drill the holes (Ø 2 mm) and screw the catcher in place.
- 4 Tension the door closer by screwing the tensioning aid (4) into the door closer, tensioning the tensioning housing of the door closer against the direction of the arrow and screwing the pressure bar back into the next hole (figure D). Repeat these steps to increase the tension. After tensioning, remove the tensioning aid.