



AXA HOME SECURITY

Stainless steel Restrictor


EN



For (back) doors that open outwards

Information

You have just acquired a high quality AXA product. The instructions below must be followed closely in order to effectively install and operate this product.

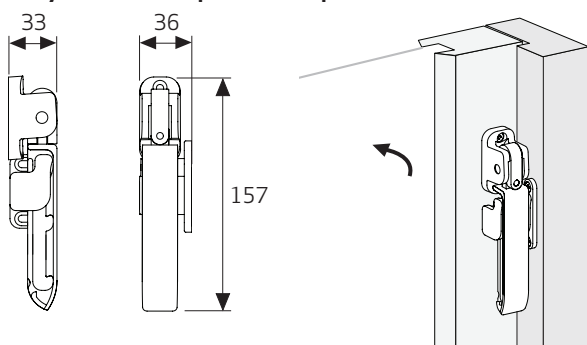


Use

For outward opening doors

Package contents

1. (1x) Window bracket
2. (1x) Frame bracket
3. (4x) 4.5 x 40 mm screws
4. (4x) 4.5 x 50 mm screws
5. (1x) Drill template

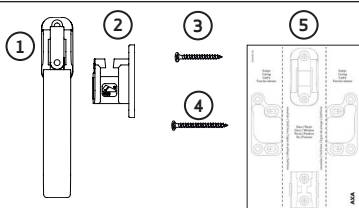


Installation tools (recommended):


(Battery) drill or screwing machine, flexible steel ruler, Ø 3 mm drill, adhesive tape, pencil or spike.

Installation position

Left or right

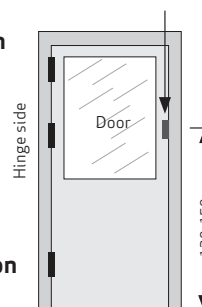

Minimum installation space required


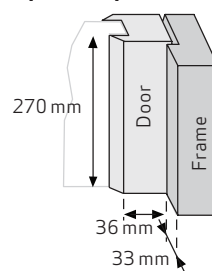


Installation manual





Take into account the installation depth of any presence of multi-point closure

- 1 Position the drill template (5) at the correct height with the fold line on the corner of the frame and the door. Tape the drilling template in place. Prick the drill markings (4x) using an awl or a pencil and then pre-drill them (Ø 3 mm, figure A).

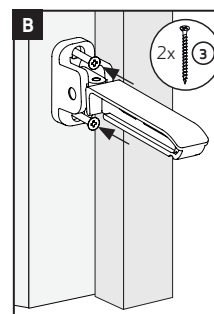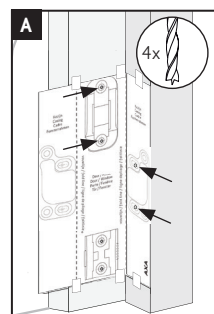


See illustration of installation position for the correct height.

- 2 Fix door bracket (1) with screws (3) (4.5 x 40 mm, figure B).
- 3 Fix frame bracket (2) with 2 screws (4) (4.5 x 50 mm, figure C) on the back slot position.

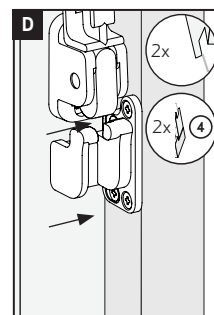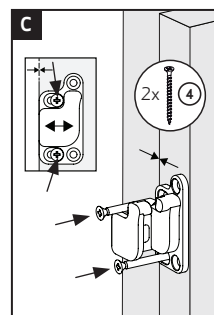

Position the back of the frame bracket flush with the frame (figure C)

- 4 Pre-drill the two foremost hole positions of the frame bracket. Secure the frame bracket with two screws (4) (4.5 x 50 mm, figure D).

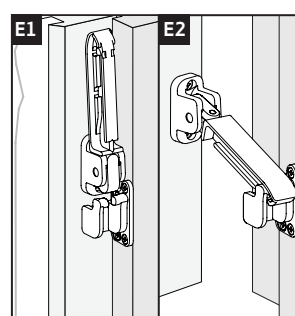

User manual

- Door open: fold door bracket upwards (figure E1)
- Door ajar: door bracket over frame bracket (figure E2)