37-248.2 (8-25)



AXA HOME/SECURITY

EN


Security tilt-and-turn window handle

SKG

POLITIE KEURMERK VEILIG WONEN

Information

You have just acquired a high quality AXA product. The instructions below must be followed closely in order to effectively install and operate this product.

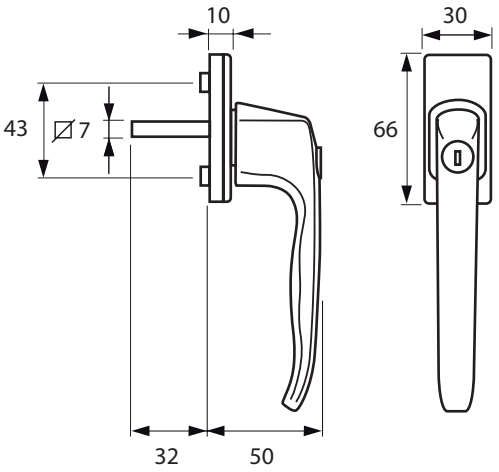


Application
Windows

Installation tools (recommended)
Screwdriver

Recommended fasteners: M5 x 45 mm


Mounting position
left or right

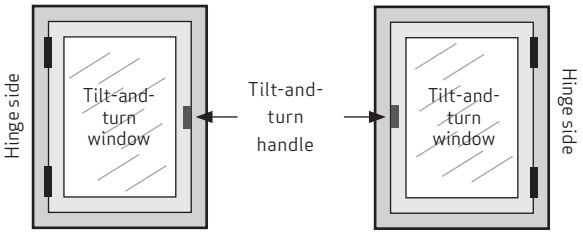

User manual

Open
Turn the handle horizontally (1), to open the window as a pivot window.
Turn the handle vertically upwards (2), to open the window as a bottom-hung window.

Close
Turn the handle vertically downwards.

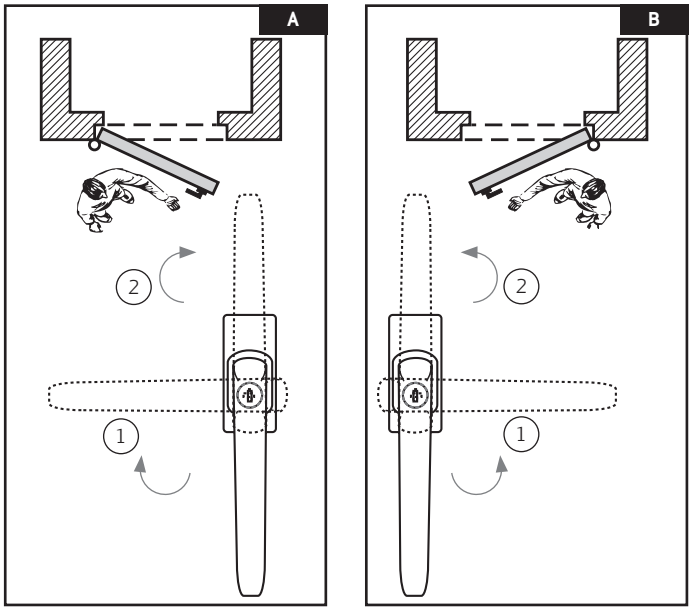

Installation manual

For inward-opening tilt-and-turn windows.

1. Make sure the window is closed and locked.
2. Place the tilt-and-turn window handle on the window with the handle pointing downwards. Make sure that the handle can be turned to the right for a right-turning window (figure **A**) and to the left for a left-turning window(figure **B**).
3. Turn the aluminium cover plate 90° to the left or right so that the mounting holes are exposed.
4. Install the turn-tilt window handle with 2 bolts M5 x 45 mm (3).
5. Cover the mounting bolts by turning the aluminium cover plate back to the vertical position so that the AXA logo is visible.

