73-007 (02-14)



AXA HOME/SECURITY


EN


Door catch stainless steel

For inward opening (front) doors

Information

You have just acquired a high quality AXA product.
The instructions below must be followed closely in order to effectively assemble and operate this product.







Use
Door catch for inward opening (front) doors


Package contents


1.	(1x)	Frame bracket	**4.**	(8x)	Screws 4.0 x 40 mm
2.	(1x)	Door peg	**5.**	(1x)	Screw wrench
3.	(2x)	Washer plate	**6.**	(1x)	Drilling template

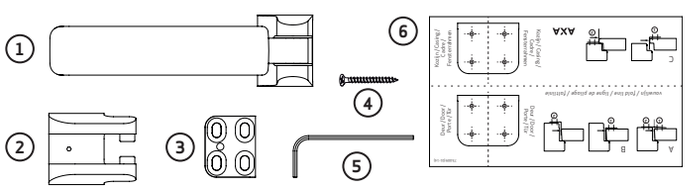


Assembly tools (recommended):
(Battery) drill or screw machine, tape measure, Ø 2 mm drill, sticky tape, pencil or awl.

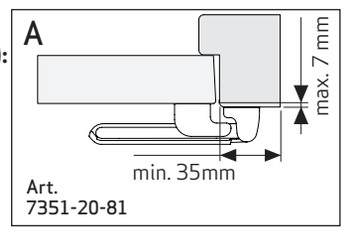

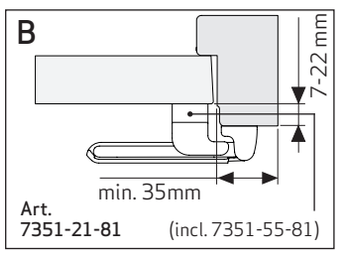

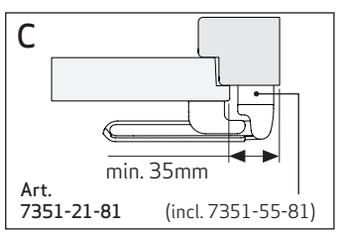

Assembly place

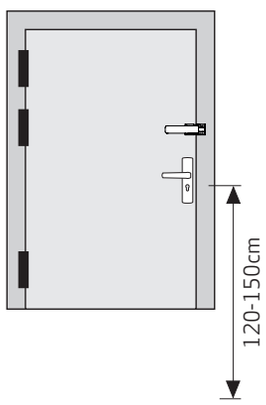



Assembly manual


1 Put the drilling template (6) in the correct position with the fold over the side of the door. Tape the drilling template in place. Prick the drill markings (8x) using an awl or a pencil and then pre-drill them (Ø 2 mm, figure **A**). The drilling template is positioned while folded in recessed (B) and rebate situations (C). See also the illustration on the drilling template.


The fold must lie precisely over the edge of the door in all situations, also when marking the holes in the frame


2 Fix the two washer plates (3) using the screws (4) (4,0 x 40 mm, figure **B**).
3 Slide the frame bracket (1) over the washer plate (frame side) and fix it by turning the adjusting screw to the left using the screw wrench (5) (figure **C**).
4 Slide the door peg (2) over the washer plate (door side) left using the screw wrench (figure **D**).
5 The slotted holes in the washer plates enable the door catch to be adjusted vertically (figure **E**).

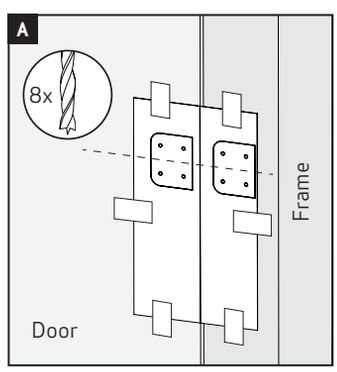


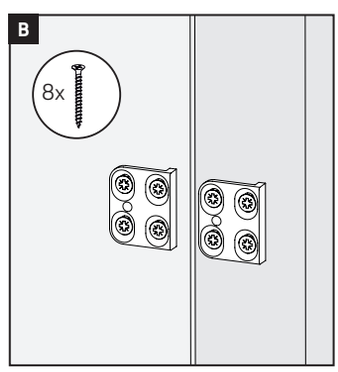

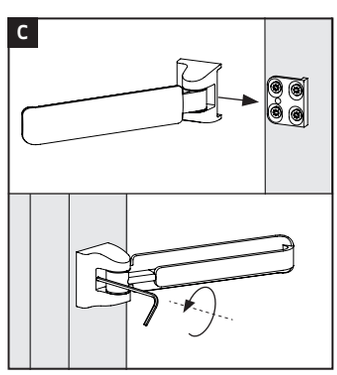

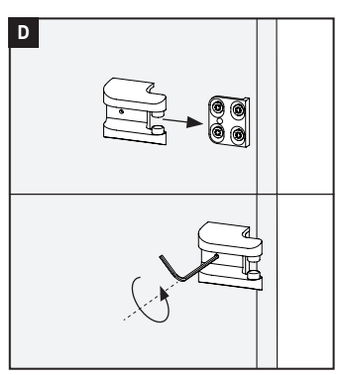

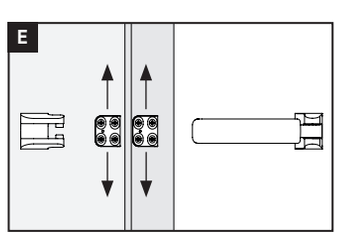

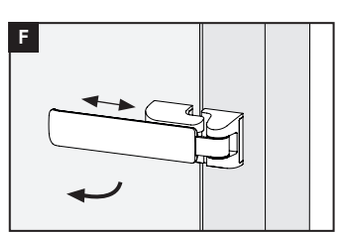

User manual

Fastening / Unfastening
Fold the frame bracket over the door peg. When the door is opened the frame bracket will slide over the door peg and the door can be opened a little way (figure **F**). Unfasten the door catch by folding back the frame bracket back while the door is closed.