37-254.2 (01-11)

Allegion NL B.V. - Energiestraat 2 - 3903 AV Veenendaal - Nederland - info.axa.home@allegion.com - axahomesecurity.com




AXA HOME/SECURITY

EN

Rim lock 3011

Information

You have just acquired a high quality AXA product. The instructions below must be followed closely in order to effectively install and operate this product.

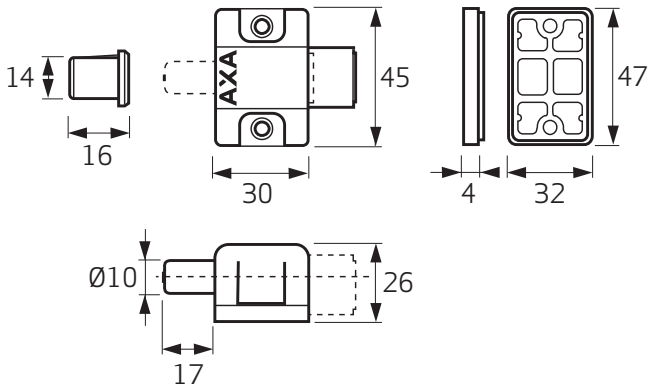


Application
Outward opening windows

Montagegereedschap (advies):
Tape measure, (battery) drill, screwdriver, drill Ø 2, 2,5 or 3 and Ø 14 mm, bradawl/pencil.


Recommended screws: 4,0 x 40 mm and 3,0 x 15 mm

Screw thickness	Pre-drilling softwood	Pre-drilling hardwood
3,0 mm	Ø 2,0 mm	Ø 2,0 mm
4,0 mm	Ø 2,5 mm	Ø 3,0 mm

Montageplaats
Links of rechts

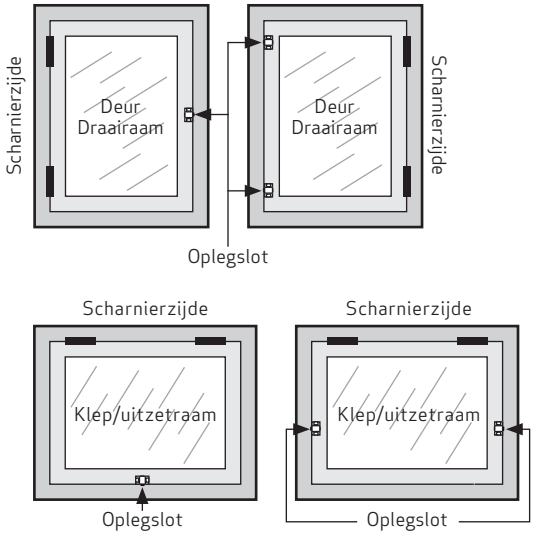

Minimaal benodigde montageruimte



Gebruikshandleiding

Openen
Plaats de sleutel in het slot en draai de sleutel +/- 60° linksom. Het slot springt open.

Sluiten
Duw met de cilinder het slot dicht. De sleutel is hiervoor niet nodig.

Montagehandleiding

1. Trek het raam goed dicht.
2. Plaats het slot op het raam en houd 5 mm tussen het kozijn en het slot (figuur A).
3. Prik de schroefgaten in het slot aan.
4. Schroef het slot met schroeven (4,0 x 40 mm) op het raam.
5. Druk op de cilinder, zodat het centerpuntje op de schoot in het kozijn een deukje veroorzaakt.
6. Open het raam.
7. Boor precies op de plaats van het deukje, met een boor van Ø 14 mm, een gat van 18 mm diep.
8. Druk in dit gat de sluitkom.
9. Schroef de sluitkom met een schroef (3,0 x 15 mm) op het kozijn.

