37-253.2 (5-25)

Allegion NL B.V. - Energiestraat 2 - 3903 AV Veenendaal - Nederland - info.axa.home@allegion.com - axahomesecurity.com



AXA HOME/SECURITY

EN


Security rim lock 3012

SKG

POLITIE KEURMERK VEILIG WONEN

Information

You have just acquired a high quality AXA product. The instructions below must be followed closely in order to effectively install and operate this product.

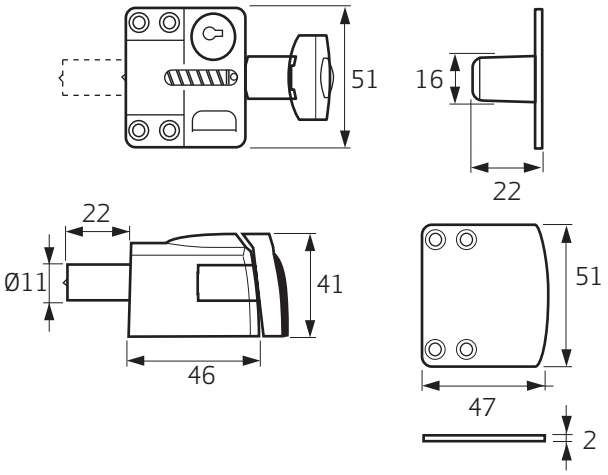


Application
Outward opening doors, windows and slide doors

Installation tools (recommended)
Tape measure, (battery) drill, screwdriver, drill Ø 2 and 16 mm, bradawl/pencil.


Recommended screws: 4,0 x 40 mm

Screw thickness	Pre-drilling softwood	Pre-drilling hardwood
4,0 mm	Ø 2,5 mm	Ø 3,0 mm

Mounting position
left or right

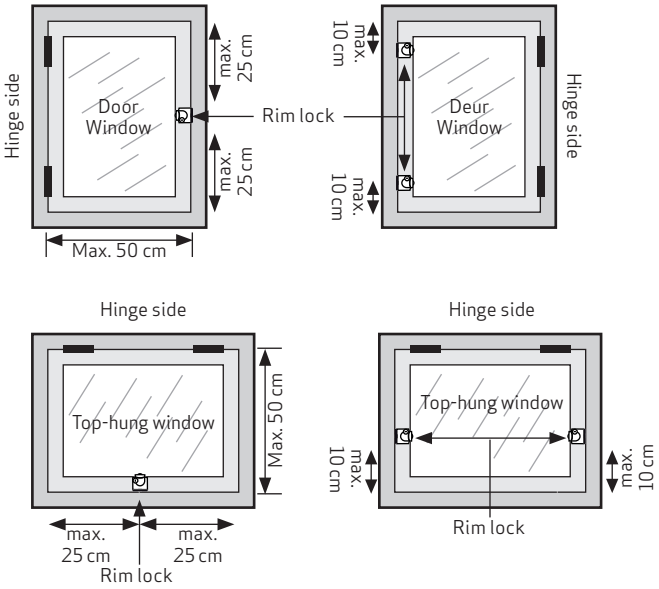

Minimum installation space required



User manual

Open
Insert the key into the lock and turn it approximately 60° counterclockwise. The lock will spring open.

Close
Push the lock shut using the push button. The key is not required for this.

Maintenance
Regularly (at least once a year) spray the cylinder and mechanism with lock spray.

37-253.2 (5-25)



AXA HOME SECURITY

EN

Security rim lock 3012

SKG

POLITIE KEURMERK VEILIG WONEN

Installation manual

The instructions below must be followed closely in order to effectively install and operate this product.

1 Close the window properly.
2 Place the lock on the window and keep 8 mm between the frame and the lock. (figure **A**).
3 Mark the screw holes of the lock.
4 Screw the lock onto the window (figure **B**) using the screws (4.0 x 40 mm, pre-drill Ø 2 mm) in the order shown.
5 Press the push button so that the centre point on the bolt makes a dent in the window frame.
6 Open the window.
7 Drill precisely at the location of the dent, using a drill bit with a diameter of 16 mm, to a depth of 23 mm.
8 Press the locking cup into this hole (figure **C**).
9 Screw the locking cup in place with the screws (4.0 x 40 mm, pre-drill Ø 2 mm) on the window frame (figure **C**).

These screws must be screwed into the frame at an angle for optimum security.

10 Make sure the lock is open and then press the cover cap onto the lock (figure **D**).

